

BRIGHT HOME INVESTMENTS, LLC

ASTORIA LN.

REQUEST FOR PROPOSALS

Landscape Design-Build Services

E. Grand Avenue and N. Mansfield Road | Ava, Missouri

Issued by	Bright Home Investments, LLC
Questions / site visits	Requested by Friday, October 2, 2026
Proposal due	Friday, October 9, 2026
Contact	brighthouseinvestments@outlook.com

What we need. Bright Home Investments is looking for one landscape design-build team to finish the landscape design for Astoria Ln. and carry it through installation and the first growing season. The work has two main parts: the 12 home lots and the shared green spaces. The shared green spaces are physically separate from the home lots and are shown as defined areas on the attached site exhibit.

1. Project goals

We do not want a standard subdivision lawn package. The landscape should feel natural, useful, and established over time, while still being practical to build and maintain.

- No conventional turf lawns. Use no-mow or low-mow groundcovers, meadow planting, planted beds, mulch, stone, and other low-maintenance treatments instead.
- Use as many trees, shrubs, perennials, groundcovers, and edible plants as the site can reasonably support without making long-term care unrealistic.
- Work edible plants into all areas of the project where they make sense, including home lots, meadow edges, the sensory garden, screening areas, and other shared spaces.
- Use native Missouri plants and other well-adapted plants suited to Ozarks conditions. We want seasonal interest, shade, pollinator value, habitat, and long-term durability.
- Make the shared spaces as accessible as possible without losing the natural character of the meadow and sensory garden.
- Keep long-term maintenance reasonable for Bright Grounds, which will take over after the first growing season.

Shared green spaces

- Walking Meadow: a place to wander, not a strip of grass. It should include flowering plants, seasonal change, habitat, places to pause, and a natural transition into the eastern garden.
- Nature/Sensory Garden: a more hands-on area for adults and children, with touch, scent, sound, edible plants, shade, wildlife value, natural materials, and smaller informal paths.
- E. Grand edge: a planted buffer that gives the east side of the site more privacy from the road.
- Stormwater areas: where the civil design allows it, use wet-meadow or other suitable planting so detention and drainage areas look like part of the landscape rather than leftover infrastructure.

2. Scope of work

Design and coordination

- Review the site and attached concept exhibits, then use the survey and civil information as it becomes available to finalize the design and quantities.
- Prepare the final landscape and planting plan, including plant and material selections, quantities, spacing, and installation details.
- Coordinate with the general contractor, civil engineer, sitework contractor, and utility work so landscape work is installed at the right time and does not have to be torn back out.
- Provide a final plant and material list, along with a simple care guide for Bright Grounds.

Home lots - 12 homes

- Landscape each lot as a whole property, not just a small front foundation bed.
- Prepare and amend the soil as needed for the plants being installed.
- Install trees, shrubs, perennials, groundcovers, meadow or low-mow cover, edible plants, mulch, stone, and other materials needed for a finished lot.

- Use a consistent groundcover strategy, core plant palette, and general material approach across the 12 lots, but do not make the lots identical. Adjust each one for lot size and shape, house placement, sun and shade, drainage, utilities, and available planting space.
- Use as many appropriate trees, shrubs, and edible plants as each lot can reasonably support without interfering with the house, utilities, access, or long-term maintenance. Larger or more open lots may support more planting than smaller or tighter lots.

Shared green spaces

The shared green spaces are a separate landscape scope from the individual home lots. Their locations are shown on the attached site exhibit. The design can move forward within those defined areas while final grades, drainage details, and exact quantities are coordinated with the civil plans.

- Walking Meadow: soil preparation, meadow establishment, flowering and naturalistic planting, the main wandering path, smaller planting pockets and edges, and final finish work.
- Nature/Sensory Garden: final design, planting, paths, soil preparation, mulch, stone, logs, boulders, seating/rest areas, sensory planting, edible planting, and installation.
- E. Grand buffer: trees, shrubs, understory planting, and other planting needed to create a useful visual screen.
- Stormwater planting: planting that works with the final engineered grades and detention function.
- Minor clearing, pruning, and prep that are directly tied to landscape installation. Major clearing, mass grading, road work, utilities, and engineered detention excavation are by others unless specifically listed as an alternate.

Paths and site features

- Build the landscape paths within the meadow and sensory garden, including base preparation and the selected surface material.
- Use a firm, stable surface for the main accessible route. Smaller side paths can be more natural where the site allows.
- Recommend practical natural features such as logs, boulders, stepping elements, simple seating, or small gathering areas where they add value.
- Keep optional features separate in the price when possible so they can be added or removed without changing the base landscape plan.

3. Planting, safety, and accessibility

Accessibility

The goal is to make as much of the shared landscape usable by as many people as possible. Accessibility should be worked into the design, not treated as a separate area.

- Provide at least one main route through the meadow and sensory garden that is firm and stable enough for wheelchairs, walkers, and strollers as site grades allow.
- Avoid unnecessary steps, abrupt changes in grade, and narrow pinch points on the main route.
- Place important sensory and edible features where they can be reached from the accessible route.
- Include places to stop and rest. Smaller side paths can stay more natural and irregular.

Plant selection and safety

- Do not use invasive species.
- Match plants to actual sun, soil, moisture, and exposure conditions.
- Avoid highly toxic plants in places where children or residents are likely to touch, forage, or play.
- Keep thorny or sharp plants away from main paths, seating, and gathering areas.
- Keep messy or heavy-dropping fruit away from main hard-surface walking routes. Edible plants are encouraged elsewhere when harvest and cleanup are reasonable.
- Use a varied plant palette, but keep it understandable and manageable for Bright Grounds.

Watering

Do not assume a permanent whole-site irrigation system. The finished landscape should be able to live on normal rainfall once established. Include temporary watering during the first growing season. If a small drip system would make sense for a specific edible planting or other limited area, show it as an alternate.

4. First growing season

The landscape contractor will be responsible for establishment care through the first growing season. After that, Bright Grounds will take over normal maintenance.

- Watering as needed during establishment.
- Weed control and reasonable cleanup.
- Meadow mowing or cutback at the proper times.
- Monitoring and minor adjustments where plants are not establishing well.
- Replacement of failed plant material during the first growing season, with normal exclusions for construction damage, owner damage, severe weather, or other causes outside the contractor's control.

- A short handoff guide listing the final plants and the basic mowing, pruning, watering, and seasonal care Bright Grounds will need to continue.

5. Construction timing

Landscape work can happen alongside site construction. It does not have to wait until every house is finished.

- Green-space soil work, paths, stone, natural features, and planting can start in areas the general contractor has released.
- Do not install permanent planting in areas that still need major grading, utility trenching, detention excavation, or heavy-equipment access.
- Home landscaping will follow completion of each home and lot and may be installed in phases.
- Plan the work so finished landscape areas are protected from later construction traffic as much as possible.

The overall project schedule is still being finalized. Please include your current availability, design lead time, plant and material lead times, and a realistic installation schedule in your proposal.

6. What to include in your proposal

Please keep the proposal straightforward. We do not need a large marketing package. We need enough information to understand who would do the work, how you would approach it, what you are assuming, and what it will cost.

- 1. Company and contact information:** Company name, primary contact, phone and email, service area, and who would lead this project.
- 2. Relevant work:** Two to four examples of similar work. Native/naturalistic landscapes, meadow establishment, edible landscapes, accessible outdoor spaces, ecological planting, and design-build work are especially useful.
- 3. Approach:** A short explanation of how you would take the attached concepts and turn them into a buildable landscape. Flag any questions or concerns you see.
- 4. Schedule:** Your availability, estimated design time, plant and material lead times, installation timing, and first-season care schedule.
- 5. Price:** Use the pricing breakdown below. List allowances, unit rates, major assumptions, and exclusions.
- 6. Warranty and plant replacement:** Explain what you normally warranty and what is included during the first growing season.
- 7. Insurance:** Confirm that you can provide proof of general liability insurance and workers' compensation coverage, if applicable.

7. Pricing

Price the full base scope, then list optional upgrades separately. This is a design-build proposal based on the site information available now. We expect useful budget pricing at this stage, with assumptions stated clearly where final quantities still depend on survey, civil work, or the completed landscape design.

Item	What to include	Price
1. Home landscaping	All 12 lots. Show a typical per-lot amount and note where lot conditions are likely to change the price.	\$ _____
2. Shared green spaces	Walking Meadow, Nature/Sensory Garden, E. Grand buffer, paths, natural features, stormwater-compatible planting, and shared-area finish work.	\$ _____
3. First growing season care	Watering, weeds, meadow cutback/mowing, monitoring, plant replacement/adjustment, and handoff.	\$ _____
BASE PROPOSAL TOTAL	Total of Items 1-3.	\$ _____

Please also list the design fee included in your base proposal: \$ _____. This is for information only; do not add it a second time outside the base price.

Where quantities are still uncertain, use reasonable allowances or unit prices and explain what you assumed. Useful unit prices may include installed trees, shrubs, perennials, meadow seeding by area, path material by square foot or linear foot, and soil or mulch by volume. We are not asking bidders to guess at quantities that cannot be known until final survey, civil work, or design decisions are complete.

Optional / alternate items

Alternate	Description	Price
A		\$ _____

B		\$
C		\$

8. Submission and selection

Send proposals to: brighthomeinvestments@outlook.com

Proposal deadline: Friday, October 9, 2026

Questions and site visits: Please contact Bright Home Investments by Friday, October 2, 2026 to arrange a site visit or ask questions. Please do not enter the property without confirming access first.

Bright Home Investments will review each proposal based on the proposed approach, relevant experience, understanding of the project, ability to coordinate with construction, accessibility, long-term maintenance, schedule, assumptions, and price.

Basic RFP terms

- This RFP does not require Bright Home Investments to award a contract or reimburse anyone for proposal costs.
- We may ask for clarification, revised pricing, cost-saving options, or additional information before making a selection.
- Final scope, price, schedule, insurance requirements, and contract terms will be set in the contract. Pricing may be adjusted as final quantities and site conditions are confirmed.
- The project is still subject to site acquisition and control, final survey and civil work, approvals, financing, and the construction schedule.


Attachments

- Appendix A - Conceptual Site Context Exhibit (proposal reference)
- Appendix B - Walking Meadow + Wild Sensory Garden Concept

Important: The attached exhibits show the current concept and the defined shared green-space areas. They are not final construction drawings. Final dimensions, grades, drainage, utilities, disturbance limits, and quantities will follow the survey, civil plans, final landscape design, and coordination with the general contractor.

ASTORIA LN.
CONCEPTUAL SITE EXHIBIT

809 E. Grand Avenue | Ava, Missouri
12 homes | 4 phases

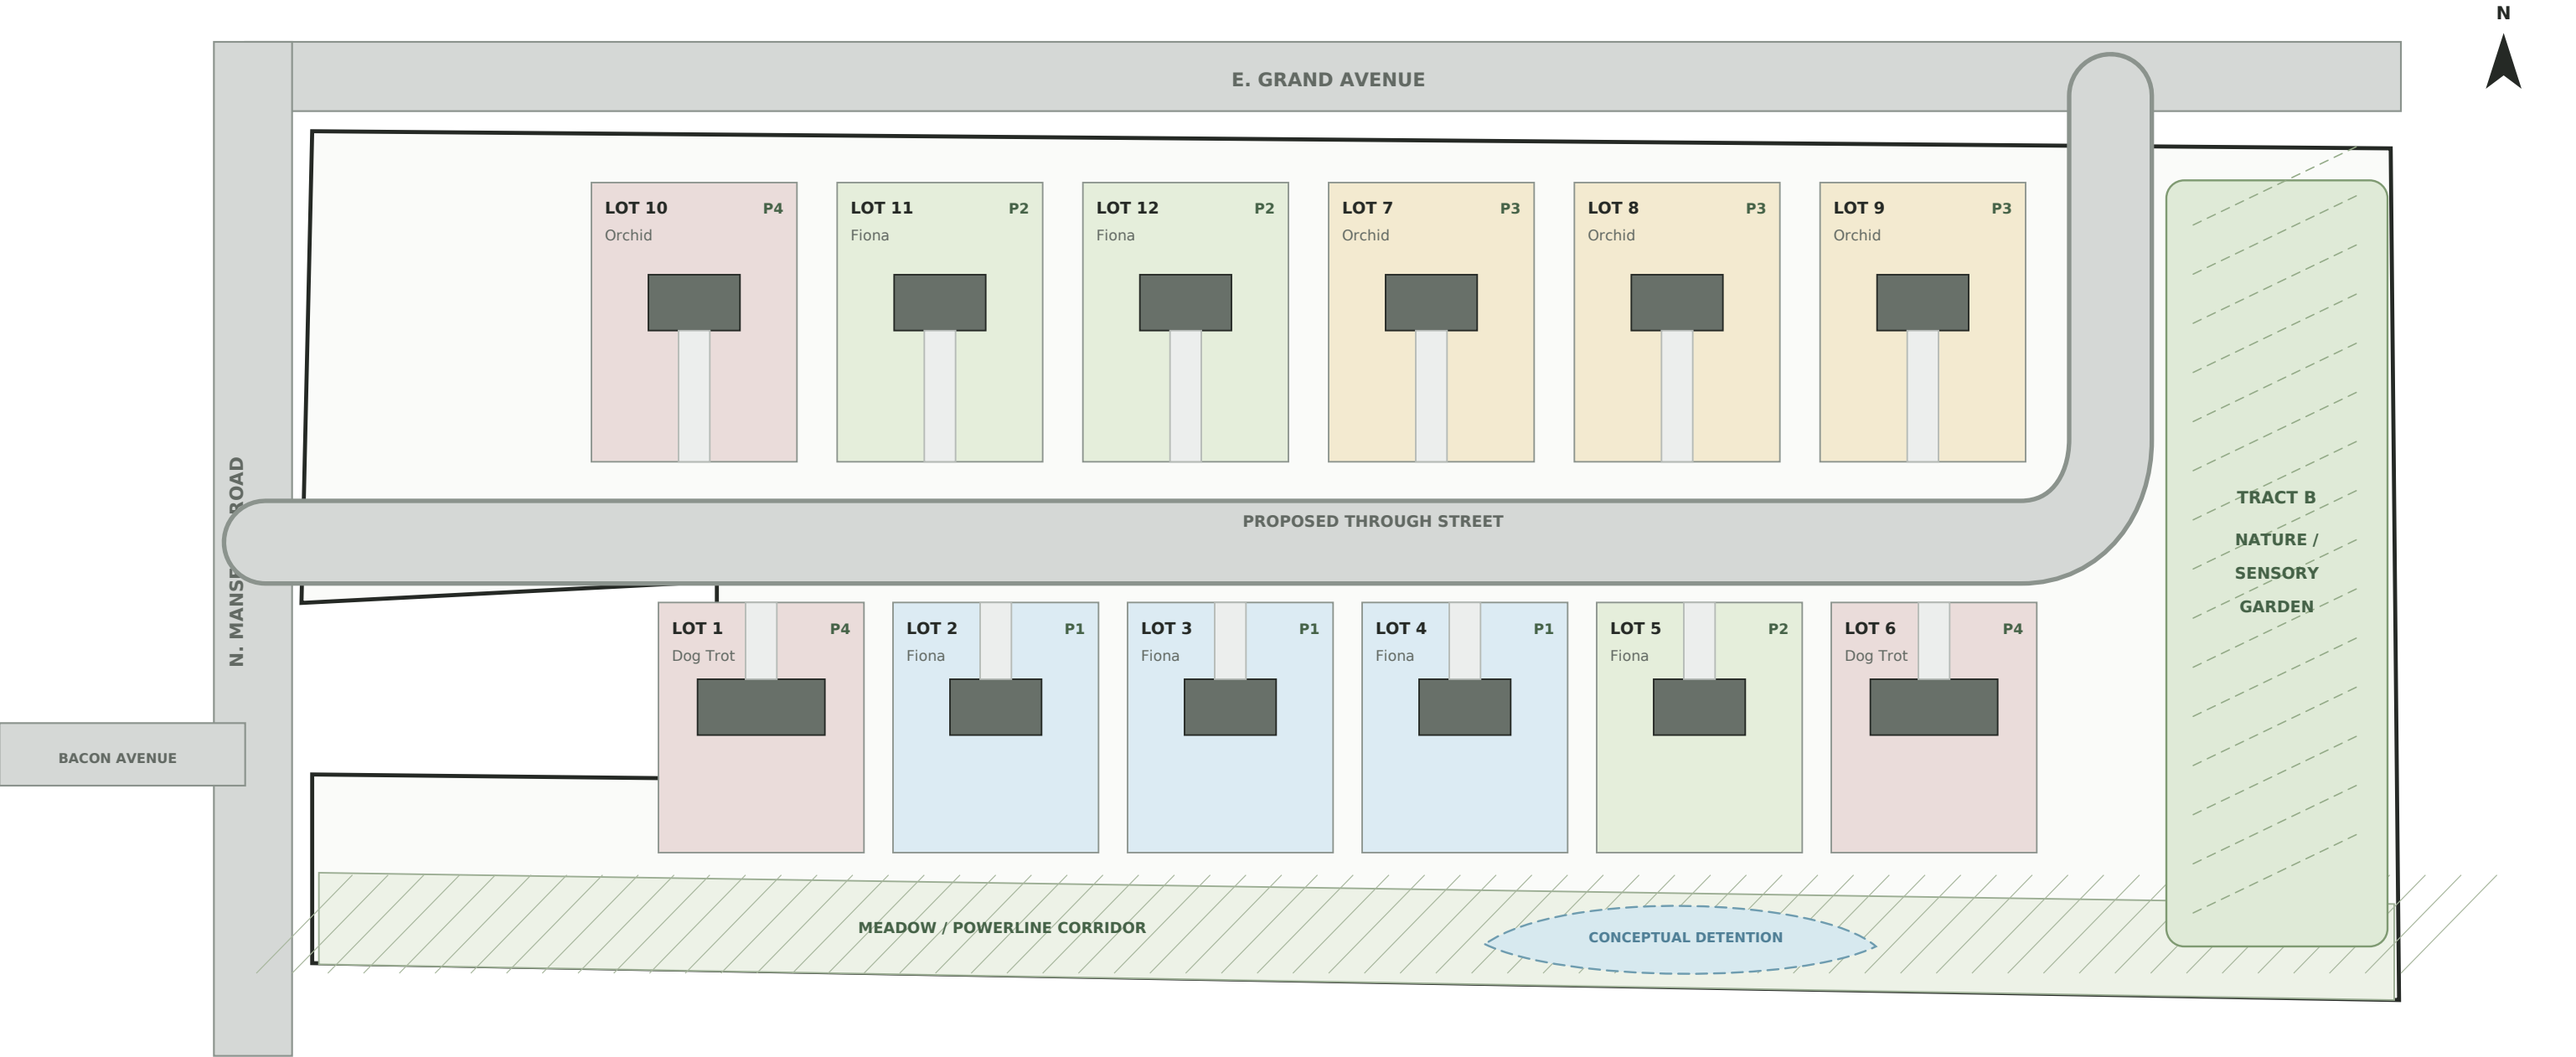

LEGEND

Phase 1

Phase 2

Phase 3

Phase 4

Nature / Sensory Garden

Proposed street

Conceptual detention

PHASING: P1 Lots 2, 3, 4 | P2 Lots 5, 11, 12 | P3 Lots 7, 8, 9 | P4 Lots 1, 6, 10

Conceptual site context for proposal purposes only. Final layout subject to survey, civil engineering and City approval.

Not for construction, permitting or recording. Proposer shall identify quantity/dimension assumptions used for pricing.

BRIGHT HOME INVESTMENTS, LLC	
ASTORIA LN. AVA, MISSOURI	
CONCEPTUAL SITE EXHIBIT	EX-1 SEPT. 15, 2026

NOT TO SCALE

